

VENSKID BESS



▼ Flexible

- Modular, expandable system for project-specific requirements

▼ Easy Installation

- Installation on strip foundation (no building infrastructure required)
- Integrated oil pan for increased operational safety

▼ Medium-voltage transformer

- 3,5 bis 8 MVA power
- Medium voltage up to 35 kV, optionally with MSA

▼ Low-voltage distribution

- Up to 36 outputs for BESS systems
- Up to 36 outputs for PV systems

▼ Self-supply

- Modular 9 / 18 / 36 outputs for BESS applications

▼ EMS

- Integrated EMS directly on the skid


TECHNICAL DATA

General Specifications	VENSKID BESS 3.5 MVA	VENSKID BESS 4 MVA	VENSKID BESS 5 MVA	VENSKID BESS 6.3 MVA	VENSKID BESS 7 MVA	VENSKID BESS 8 MVA
Dimensions L x W x H	7,500 x 2,440 x 3,000 mm					
Weight approx.	14.6 t	15.3 t	16.8 t	18.1 t	20.2 t	21.4 t
Enclosure Protection Class MSA/LVDB/EMS	Double-walled outdoor enclosure IK-10, IP55					
Protection Class Transformer	C4-L, junction box: IP55					
Noise Level	< 72 dB(A) at 1 m					
Temperature Range, Operation	- 25 to + 40 °C (Derating > 40°C)					
Transformer Cooling	ONAN					
LVDB Cooling	Air-conditioned					
Installation Location	≤ 1,000 m above sea level					
Humidity	≤ 95% non-condensing					
Environmental Protection	Oil/ester collection tray, integrated into the steel skid in accordance with TRwS and StawaR, with a 1 1/2" drain					
Drainage of Collection Tray	optional oil/ester separator for 1 1/2" drain					
MV Switchgear (optional ¹⁾)						
Type	Compact outdoor RMU					
Voltage Level	24 kV / 36 kV					
Insulation	24 kV SF6-free / 36 kV with SF6					
Rated Current	630 A					
Switch Panels	Ring-Ring-Switch					
MV Transformer						
Rated Voltage	10 kV / 20 kV / 33 kV / 35 kV (other voltages available upon request)					
Rated Power	3.5 MVA	4 MVA	5 MVA	6.3 MVA	7 MVA	8 MVA
Power Frequency	50 Hz					
Primary Tap Change	- 5 %, - 2.5 %, 0 %, + 2.5 %, + 5 %					
Switching Group	Dyn5		Dyn5 / yn5			
Rated Current	2,950 A	3,350 A	2 x 2,100 A	2 x 2,650 A	2 x 2,950 A	2 x 3,350 A
LVDB						
Number of LVDB	1					
Rated Voltage	690 V AC					
Total Rated Current	2,929 A	3,347 A	4,184 A	5,272 A	5,858 A	6,694 A
Number of Circuit Breakers	1		2			
Max. Current (per Circuit Breaker)	3,200 A	4,000 A	2,500 A	3,200 A		4,000 A
BESS Outputs	18		36			
Fuse Rating per BESS Output	200 A NH2					
400 V Auxiliary Circuits for BESS	9 (0.5 C system) / 18 (0.25 C system)		18 (0.5 C system) / 36 (0.25 C system)			
230 V UPS Supply Circuits for BESS	9 (0.5 C-system) / 18 (0.25 C-system)		18 (0.5 C-system) / 36 (0.25 C-system)			
UPS Power	5,000 VA (approx. 4 min. @ 4,500 W)		5,000 VA (approx. 4 min. @ 4,500 W) / 10,000 VA (approx. 4 min. @ 9,000 W)			
Customer Interface (optional)	Power output 400 V 3P/N/PE 20 kVA					
EMS						
Type	VENCONTROL XL Outdoor					
Communication with BESS and PV	RJ 45 Ethernet / MODBUS-TCP					
External Communication	SFP slot (custom fiber network) / optional IEC104 interface					
Web User Interface	included					
Remote Access	optional (static IP required)					
Protection Devices						
Grid and System Protection	optional zEKS					
Short-Circuit and Cable Protection on the Low-Voltage Side	Load break switch + fuses					
SPD - (Low-Voltage Side)	including Type 1/2					
Monitoring / Alarm Management	included via EMS (grid monitoring, transformer, circuit breaker, drip pan, surge protection, ...)					
Transformer Protection	Multi-transformer protection relay (pressure, temperature, dielectric level measurement, gas detection)					
Measurement on the Low-Voltage Side	optional customer-specific transformer measurement					
SPD - EMS Network	including Type 1					

¹: MSA in RMU design for use in customer-owned medium-voltage distribution networks; supplied without metering, protection, control, communication, or billing equipment.

VENSYS VENSKID BESS

Grid-connected applications

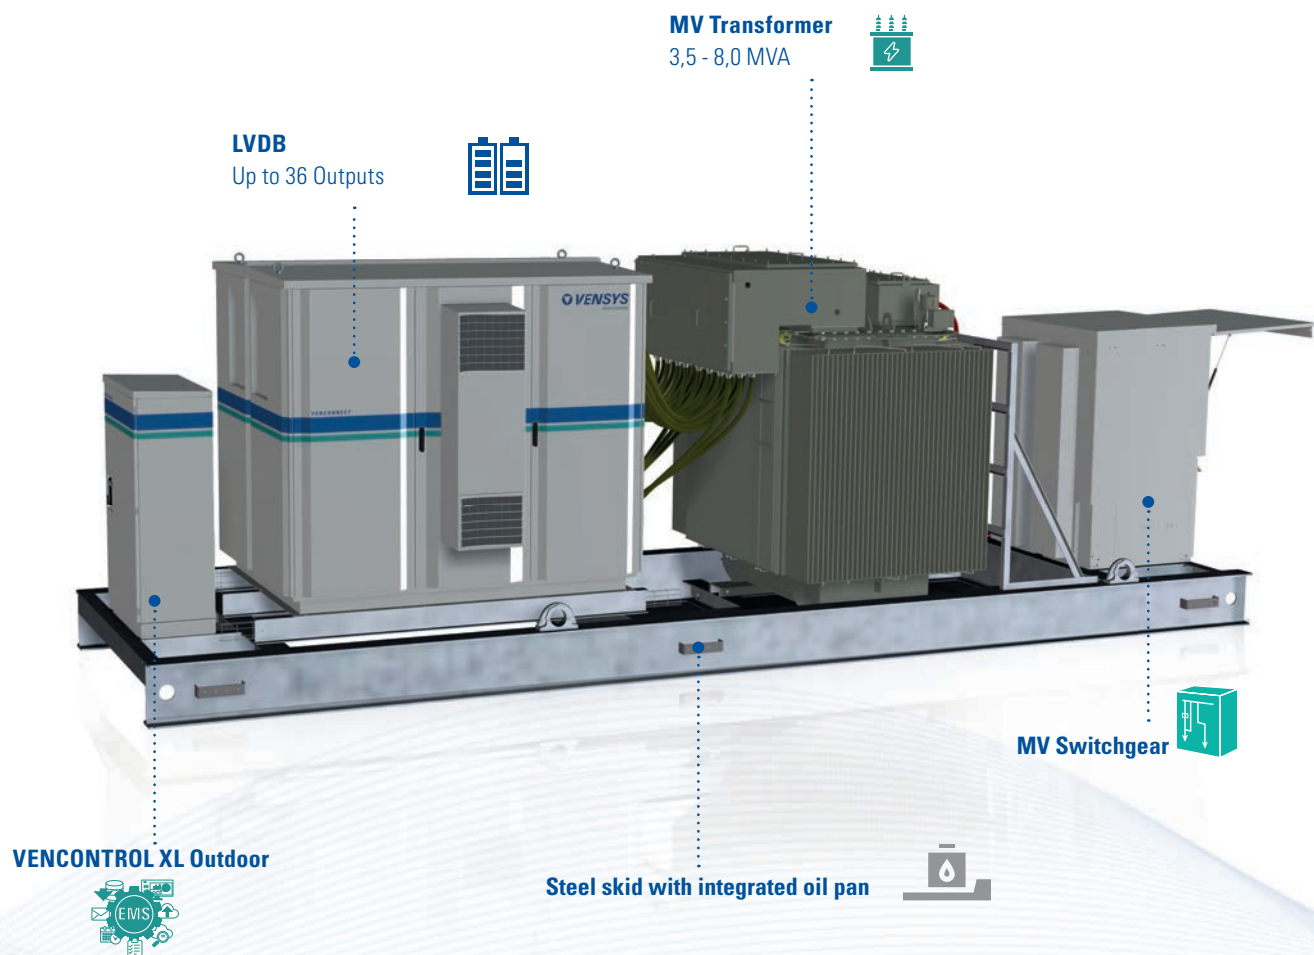



VENSYS Elektrotechnik GmbH

Dieselstraße 12
49356 Diepholz
Deutschland

T +49 5441 92630-0
F +49 5441 92630-11
sales@vensys-elektrotechnik.de
www.vensys-elektrotechnik.de

Publisher: VENSYS Elektrotechnik GmbH All rights reserved. The content of this document is for information purposes only. Subject to change. VENSYS does not accept responsibility or any kind of guarantee for the accuracy of the information provided. Reproduction, use or distribution not permitted without our prior written consent.

Photos: Adobe Stock, istock, VENSYS. **Last updated:** July 2026